

AD-A188 154

HIGH YIELD SYNTHESIS OF B4C/BN CERAMIC MATERIALS BY
PYROLYSIS OF POLYMERI. (U) MASSACHUSETTS INST OF TECH
CAMBRIDGE DEPT OF CHEMISTRY W S REES ET AL. 84 NOV 87

1/1


UNCLASSIFIED

TR-24 N00014-85-K-0645

F/G 7/6

NL



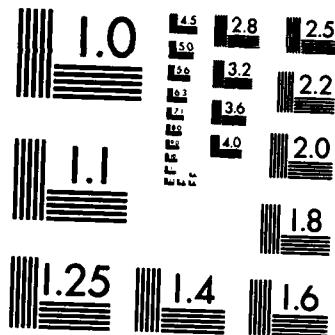

MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

• DTIC FILE COPY

(12)

AD-A188 154

OFFICE OF NAVAL RESEARCH
CONTRACT N00014-85-K-0645
Task No. NR 631-618

TECHNICAL REPORT NO. 24

HIGH YIELD SYNTHESIS OF B₄C/BN CERAMIC
MATERIALS BY PYROLYSIS OF POLYMERIC
LEWIS BASE ADDUCTS OF DECABORANE(14)

by

William S. Rees, Jr. and Dietmar Seydel

To be published in

J. American Ceramic Society
(Communications)

Department of Chemistry
Massachusetts Institute of Technology
Cambridge, MA 02139

November 4, 1987

DTIC
ELECTED
NOV 23 1987
S D
C H

Reproduction in whole or in part is permitted for any purpose of the United States
Government.

This document has been approved for public release and sale; its distribution is
unlimited.

0 51 1 1 2 3 4 5 6 7 8 9 10

UNCLASSIFIED

~~SECURITY CLASSIFICATION OF THIS PAGE~~

A188 154

REPORT DOCUMENTATION PAGE

High Yield Synthesis of B₄C/BN Ceramic Materials by Pyrolysis of
Polymeric Lewis Base Adducts of Decaborane (14)

William Smith Rees, Jr. and Dietmar Seydel*

Department of Chemistry
Massachusetts Institute of Technology
Cambridge, Massachusetts 02139



In previous work, we have developed useful polymeric precursors whose pyrolysis provides high yields of silicon nitride or silicon nitride/silicon carbide blends.¹ The main applications of such "preceramic polymers" (preparation of ceramic fibers and coatings and their use as binders for ceramic powders) require that the polymeric precursor be processable, i.e., soluble in organic solvents and/or fusible.

Although the major efforts of workers in the preceramic polymer area have, to date, been directed toward the development of useful precursors for silicon carbide, silicon nitride, "silicon carbonitride" and silicon oxynitride, boron-containing ceramics (the carbide, nitride, phosphides, silicides and others) are a class of ceramic materials whose properties are very attractive in terms of high technology applications.² Thus boron carbide has exceptional thermal stability (mp 2450°C), a microhardness of 4.05 GPa (vs 2.53 GPa for SiC), high compressive strength and radiation stability.³ Various routes exist for the preparation of boron carbide and boron nitride. For boron carbide, however, none of these proceed by way of a processable intermediate. For boron

ever 17

Session For	
GRA&I	<input checked="" type="checkbox"/>
TAB	<input type="checkbox"/>
Sounced	<input type="checkbox"/>
ification	<input type="checkbox"/>


stitution/
ibility Codes
Avail and/or
Special

Supported in part by Contract No. N00014-85-K-0645 (SDIO/IST)

*Member, the American Ceramic Society

cont'd

nitride, preparative routes based on the pyrolysis of silicon-substituted, oligomeric borazines^{4a,b} and of a boric acid/1,2,3-propanetriol condensation product^{4c} have been reported.


We report the results of our initial efforts to develop processable polymeric precursors whose pyrolysis gives boron-containing ceramic materials in high yield. The initial objective of our research was the preparation and evaluation of polymers which would serve as precursors for boron carbide or blends of boron carbide and boron nitride. 

Various polyhedral borane systems were considered as candidates for the boron-containing component in the design of the preceramic polymer. Since the pyrolysis of the polymer should give a high ceramic yield (to minimize shrinkage and the destructive effect of evolved gases), the pyrolysis chemistry should involve extensive thermal crosslinking so that retention of the pyrolysis charge is maximized. Thermal "cracking", the evolution of volatile molecules containing the elements of interest (B, C, and N in the present case), should be avoided as much as possible. On the basis of these considerations, we directed our efforts to an investigation of the applicable chemistry of decaborane (14) which has a reactive, open nido structure (Fig. 1) rather than to the more stable closo borane derivatives. The known reactivity of $B_{10}H_{14}$ is well suited to the preparation of polymeric derivatives. A well-studied reaction of $B_{10}H_{14}$ is the Lewis base substitution process shown in eq. 1. Electron



donors of diverse type ($:L$) undergo this reaction with $B_{10}H_{14}$ in an

organic solvent at ambient temperature with evolution of one mole of H₂ and formation of L·B₁₀H₁₂·L compounds whose structure is shown in Fig. 2. There is no polyhedral rearrangement during the reaction, the only structural difference being the relocation of the B-H-B 3-center, 2-electron bridge bonds upon going from one nido structure to the other.⁵ It will be appreciated that if the Lewis base molecule used in eq. 1 has two electron pair donor sites, then a polymer should result (eq. 2).



Some examples of such polymers already were reported 25 years ago, in which the difunctional Lewis base molecules (:L~\sim~\sim~L:) were Et₂PCH₂CH₂PEt₂,⁶ Ph₂POPPh₂ and Ph₂PN = PPh₂CH₂CH₂PPh₂ = NPPh₂.⁷ These and other phosphorus-containing polymers which we prepared (:L~\sim~\sim~L: = Ph₂PCH₂CH₂PPh₂, Ph₂PC≡CPPPh₂, Ph₂PNHNHPPPh₂) proved to be largely unsuitable for our purposes for two main reasons: (1) There was a high retention of excess carbon and phosphorus when they were pyrolyzed to 1000°C under argon (for instance, [B₁₀H₁₂·Ph₂POPPh₂]_x gave a 93% ceramic yield on pyrolysis, leaving a residue which contained 52.01%C, 25.30%B, 8.69%P and 12.05%O). (2) Fibers could not be prepared from them, although some of them, e.g., the [B₁₀H₁₂·Ph₂POPPh₂]_x polymer served well as binders for B₄C powder in the preparation of shaped bodies and as such in the preparation of ceramic monoliths by pyrolysis of shaped polymer bodies.

Such problems were not encountered with the new $B_{10}H_{12}$ -ethylenediamine polymers⁸ which were prepared by the reaction of $B_{10}H_{14}$ with the appropriate diamine in a suitable organic solvent. In diethyl ether or tetrahydrofuran medium solvated products, e.g., $\{[B_{10}H_{12}\cdot H_2NCH_2CH_2NH_2] (Et_2O)_{0.15}\}_n$ in the case of the ethylenediamine product, were obtained. Unsolvated products may be obtained by employing hexane or toluene as the reaction medium. These are soluble in polar organic solvents such as dimethylformamide, dimethyl sulfoxide, hexamethylphosphoric triamide and acetone, but not in hydrocarbon solvents such as benzene, toluene or hexane. The inapplicability of vapor pressure osmometry to the determination of their molecular weight suggests that their molecular weights exceed 50,000. Such $B_{10}H_{12}$ -diamine polymers were prepared using $H_2NCH_2CH_2NH_2$, $(CH_3)_2NCH_2CH_2N(CH_3)_2$, $(CH_3)_2NCH_2CH_2NH_2$, a commercial 85/15 $CH_3NHCH_2CH_2NHCH_3/CH_3NHCH_2CH_2NH_2$ mixture, $H_2N(CH_2)_3NH_2$, and other diamines. Heating these polymers above $120^\circ C$ gives materials of reduced solubility in solvents of medium polarity: thermal crosslinking processes appear to be operative. In the case of the $[B_{10}H_{12}\cdot H_2NCH_2CH_2NH_2]_x$ polymer, pyrolysis under argon to $1000^\circ C$ ($10^\circ C/min$) left a gray-black amorphous residue in 83% yield. Its composition (analysis for C, B, N) could be rationalized in terms of a constitution $(B_4C)_1 (BN)_1 (C)_{0.19}$. Further heating to $1500^\circ C$ under argon resulted in another 6.8% weight loss and left a ruddy-brown colored ceramic residue which now contained a slight excess of boron. This material, on examination by powder X-ray diffraction, showed the presence of B_4C . Examination of both the amorphous and crystalline pyrolysis products by diffuse reflection

infrared Fourier transform (DRIFT) spectroscopy showed absorptions due to B-C and B-N bonds. Similarly, pyrolysis of $\{B_{10}H_{12}\cdot(CH_3)_2NCH_2CH_2N(CH_3)_2\}_x$ gave $(B_4C)_1(BN)_1(C)_{0.53}$ (80% yield) at $1000^\circ C$ and $(B_4C)_1(BN)_1(C)_{0.17}$ at $1500^\circ C$. High ceramic yields were observed in the pyrolysis to $1000^\circ C$ under argon of other systems: $[B_{10}H_{12}\cdot(CH_3)_2NCH_2CH_2NH_2]_x$, 85%; $[B_{10}H_{12}\cdotH_2N(CH_2)_3NH_2]_x$, 89%; $[B_{10}H_{12}\cdotH_2NC_6H_4NH_2(\text{para})]_x$, 88%. (TGA-derived yields; yields of pyrolysis of larger quantities in a tube furnace usually gave ceramic yields 3 - 10% lower).

Ceramic monoliths may be produced by pyrolysis (under argon) of a rectangular polymer bar. The resulting ceramic bar, uniformly shrunken by ~10%, was found to be of excellent strength. These $B_{10}H_{12}\cdot$ diamine polymers can serve as good to excellent binders for commercial boron carbide powder, (0.5g polymer/2.5g B_4C) in that pyrolysis (under argon) of a rectangular B_4C powder/polymer binder bar gave a ceramic bar that had retained its shape without undergoing any discernible shrinkage or bloating. Fibers could be pulled from a syrup of the $[B_{10}H_{12}\cdotH_2NCH_2CH_2NH_2]_x$ polymer and DMSO/acetone. The green fibers maintained their form and could be pyrolyzed (to $1000^\circ C$ under argon) to give black ceramic fibers $3 - 5 \mu$ in diameter. Scanning electron microscopy (SEM) showed them to have a circular cross-section, a smooth surface and no obvious major flaws (Fig. 3). Others of the $B_{10}H_{12}\cdot$ diamine polymers noted above were capable of forming fibers. The polymers derived from $(CH_3)_2NCH_2CH_2N(CH_3)_2$ and from the 85/15 $CH_3NHCH_2CH_2NHCH_3/CH_3NHCH_2CH_2NH_2$ mixture melt when heated (mp 246

-250°C and 222 - 225°C, respectively) and may be suitable for melt-spinning.

The $B_{10}H_{12}$ diamine polymers also serve as boron nitride precursors. Their pyrolysis to 1000°C in a stream of ammonia (rather than argon) leaves a white ceramic residue. These samples were, within our limits of determination, spectroscopically indistinguishable from authentic boron nitride. Analytical data supported this. For instance, the pyrolysis of $[B_{10}H_{12} \cdot H_2NCH_2CH_2NH_2]_x$ in a stream of ammonia gave a powdery ceramic residue in 62.4% yield which contained B and N in 1.02 : 1 ratio and only a slight amount (0.08g atom/g atom N) of carbon. In a manner like that described above, a ceramic bar was produced by pyrolysis (to 1000°C under ammonia) of a rectangular BN powder/polymer binder (2.7g BN/0.3g polymer) bar. The resulting white bar was of excellent strength and exhibited shape retention in all dimensions. White ceramic fibers, with solid circular cross-sections, could be obtained by pyrolysis of green fibers (produced as outlined above) under an atmosphere of NH_3 (to 1000°C).

The syntheses of the $B_{10}H_{12}$ diamine polymers are easily effected; the polymers are stable at room temperature and their pyrolysis gives a high yield of the desired ceramic product without producing large amounts of excess free carbon or boron. They are soluble in polar organic solvents and so the desired applications may be realizable. It is clear that potentially useful preceramic polymers which serve as precursors for boron nitride and for boron carbide/boron nitride blends are in hand. Detailed studies of the ceramic materials formed in their pyrolysis are in progress.

REFERENCES

1. (a) D. Seyferth, G.H. Wiseman and C. Prud'homme, "A Novel Liquid Silazane Precursor to Silicon Nitride", *J. Am. Ceram. Soc.*, 66 [1] C-13 - C14 (1983).
(b) D. Seyferth and G. H. Wiseman, "High Yield Synthesis of $\text{Si}_3\text{N}_4/\text{SiC}$ Ceramic Materials by Pyrolysis of a Novel Polyorganosilazane", *J. Am. Ceram. Soc.*, 67 [7] C-132 - C-133 (1984).
(c) D. Seyferth and G.H. Wiseman, "Preceramic Organosilazane Polymers", U.S. patent 4, 482,669 (Nov. 13, 1984).
(d) D. Seyferth, T. G. Wood and Y.-F. Yu, "Method for Forming New Preceramic Polymers for SiC and $\text{Si}_3\text{N}_4/\text{SiC}$ Systems", U.S. patent 4,645,807 (Feb. 24, 1987).
(e) D. Seyferth and Y.-F. Yu, "Method for Forming New Preceramic Polymers Containing Silicon". U.S. patent 4,639,501 (Jan. 27, 1987).
(f) D. Seyferth and Y.-F. Yu, "Method for Converting Si-H Containing Polycarbosilanes to New and Useful Preceramic Polymers and Ceramic Materials", U.S. patent 4, 650,837 (Mar. 17, 1987).
2. K. J. Wynne and R.W. Rice, "Ceramics via Polymer Pyrolysis", *Ann. Rev. Mater. Sci.*, 14, 297-334 (1984).
(b) R.W. Rice, "Ceramics from Polymer Pyrolysis. Opportunities and Needs - A Materials Perspective", *Am. Ceram. Soc. Bull.*, 62, 889-892 (1983).
3. (a) R. Thompson, "The Chemistry of Metal Borides and Related Compounds", in "Progress in Boron Chemistry", Vol. 2, R. J. Brotherton

- and H. Steinberg, ed., Pergamon, London, 1970, pp. 173 - 230.
- (b) R.H. Wentorf, Jr., in "Kirk-Othmer Encyclopedia of Chemical Technology", Third Edition, Vol. 4, Wiley, New York, 1978, pp. 126 - 127.
4. (a) K.J.L. Paciorek, R.H. Kratzer, D.H. Harris, M.E. Smythe and P.F. Kimble, "Boron Nitride Preceramic Polymers", U.S. patent 4,581,468 (Apr. 8, 1986).
- (b) C.K. Narula, R.T. Paine and R. Schaeffer, "Precursors to Boron-Nitrogen Macromolecules and Ceramics", Mat. Res. Soc. Symp. Proc., Vol. 73, 383-388 (1986).
- (c) H. Wada, S. Ito, K. Kuroda and C. Kato, "The Synthesis of Boron Nitride and Boron Carbide by Pyrolysis of Boric Acid/1,2,3-Propanetriol Condensation Product", Chem. Lett., 691-692 (1985).
5. "Gmelin Handbook of Inorganic Chemistry", 8th Edition, Vol 54, "Boron Compounds: B-H Compounds", Part 3, K. Niedenzu and K.-C. Buschbeck, ed., Springer-Verlag, Berlin, 1979, pp. 151-165.
6. G.W. Parshall, "Hydrocarbylphosphinodecaboranes and Fuel Compositions Containing Them", U.S. patent 3,035,949 (May 22, 1962).
7. (a) H. Schroeder, J.R. Reiner and T.A. Knowles, "Chemistry of Decaborane - Phosphorus Compounds. III. Decaborane-14-Phosphine Polymers," Inorg. Chem., 2, 393-396 (1963).
- (b) J.R. Reiner and H.A. Schroeder, "Linear Condensation Polymers from Bis(Phosphine)decaboranes", U.S. patent 3,141,856 (July 21, 1964).
- (c) H.A. Schroeder, "Novel Polymers From the Condensation of Bis(azidodiarylphosphine)decaborane and Diphosphines", U.S. patent 3,155,630 (Nov. 3, 1964).

8. Materials claimed to be linear polymers, $[B_{10}H_{12} \cdot R_2NCH_2CH_2NR_2]_x$ ($R = CH_3$ and C_2H_5) had been claimed earlier, but their reported complete insolubility in organic solvents indicates that extensive crosslinking (i.e., chemical modification) had occurred during their preparation in benzene at $80^{\circ}C$ and thermally effected solvent removal: R. H. Cragg, M. S. Fortuin and N. N. Greenwood, "Complexes of Decaborane. Part I. Ultraviolet Spectra of Some Bis(Ligand) Complexes containing Phosphorus and Sulfur", J. Chem. Soc. A., 1617-1621 (1970).

Figure 1. Structure of Decaborane (14), $B_{10}H_{14}$

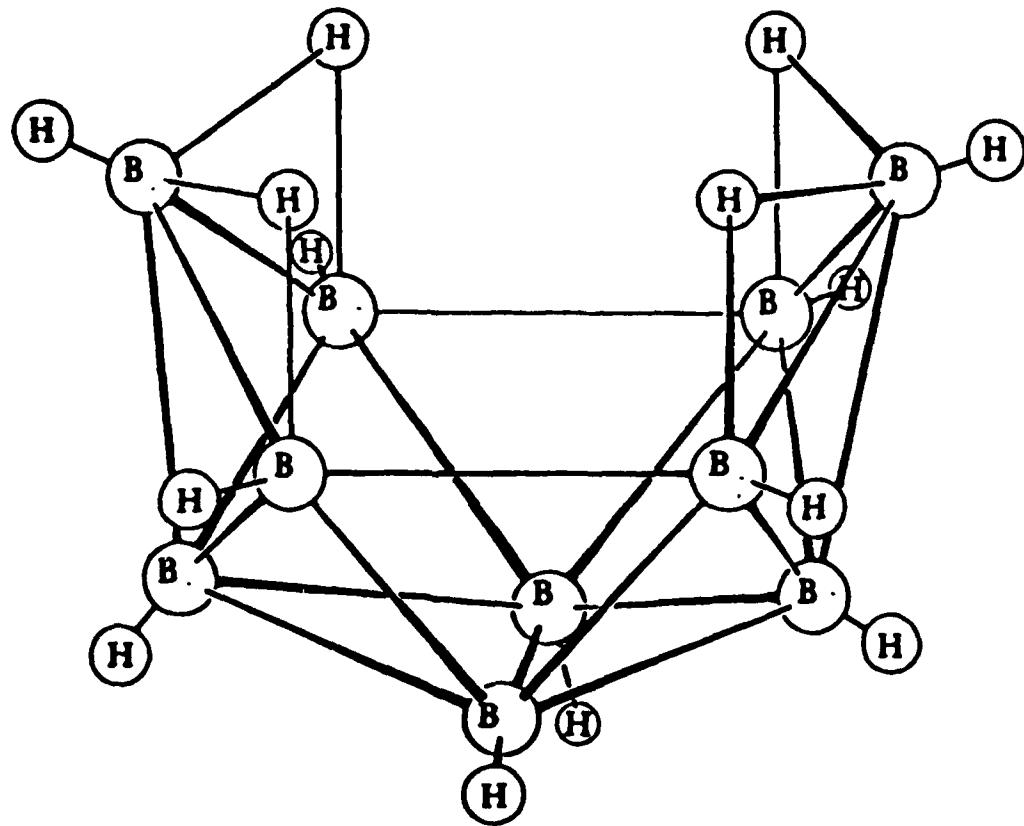


Figure 2. Structure of $B_{10}H_{12} \cdot 2$ Ligand Complexes


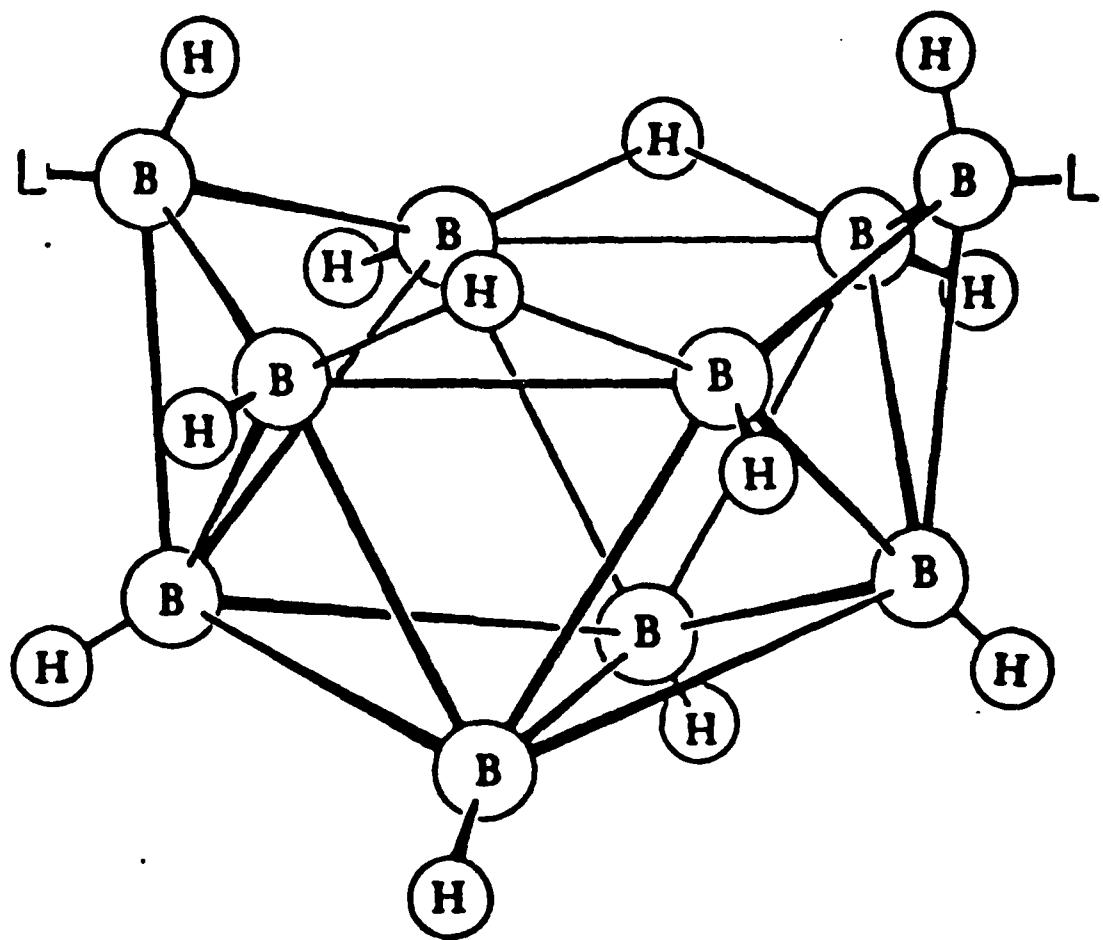



FIGURE 3.

SEM photographs of ceramic fibers derived from [B₁₀H₁₂·H₂NCH₂CH₂NH₂]_x

- a) note long, regular shape
- b) note small size and smooth surface

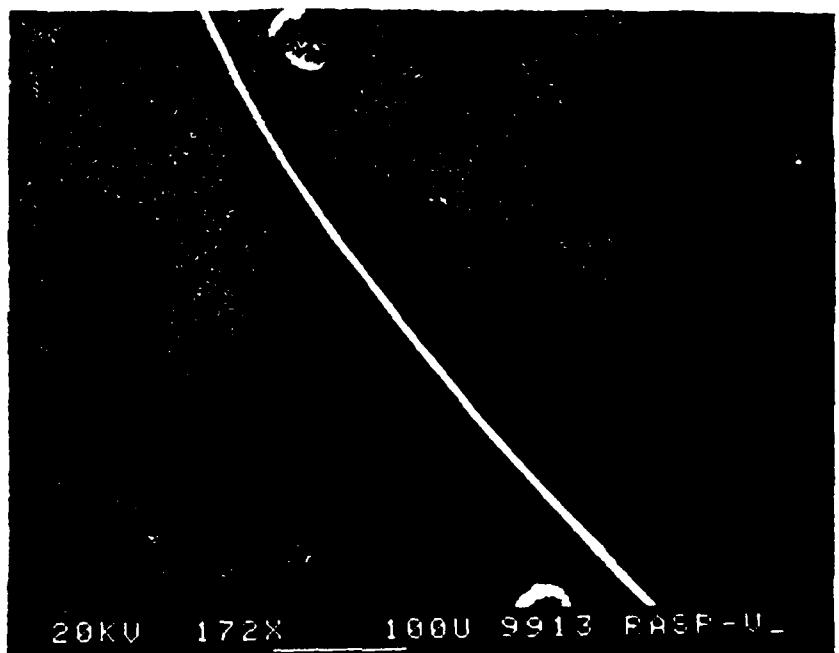

(a)

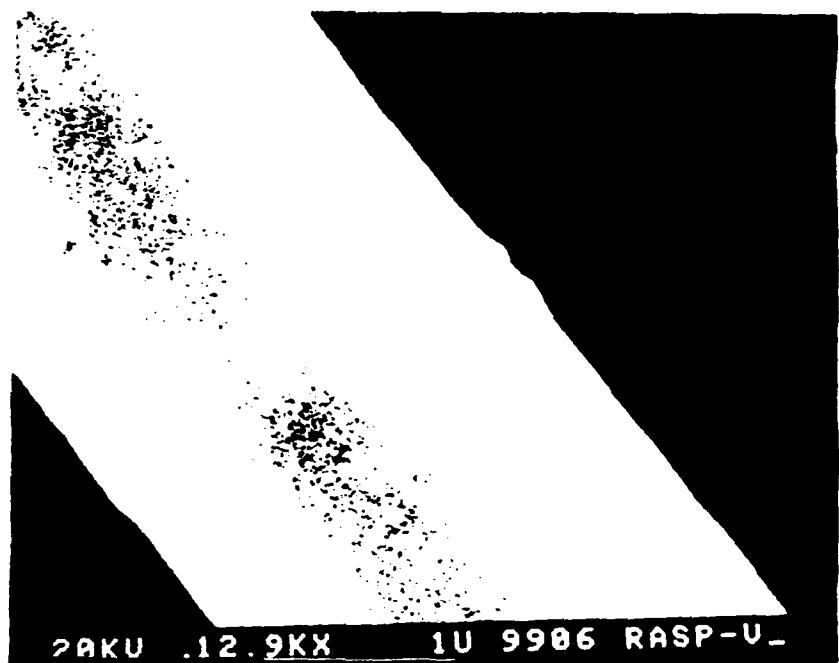

PAKU .12.9KX 1U 9906 RASP-U-

(b)

High Yield Synthesis of B₄C/BN Ceramic Materials of Pyrolysis of
Polymeric Lewis Base Adducts of Decaborane(14)

William Smith Rees, Jr. and Dietmar Seydel

Department of Chemistry
Massachusetts Institute of Technology
Cambridge, Massachusetts 02139

ABSTRACT

Polymers of type [B₁₀H₁₂ · diamine]_x (diamine = H₂NCH₂CH₂NH₂, (CH₃)₂NCH₂CH₂NH₂, (CH₃)₂NCH₂CH₂N(CH₃)₂, etc.) have been found to be useful ceramic precursors. In a stream of argon, their pyrolysis gives B₄C/BN, in a stream of ammonia, BN.

DL/1113/87/2

TECHNICAL REPORT DISTRIBUTION LIST, GEN

	<u>No.</u> <u>Copies</u>		<u>No.</u> <u>Copies</u>
Office of Naval Research Attn: Code 1113 800 N. Quincy Street Arlington, Virginia 22217-5000	2	Dr. David Young Code 334 NORDA NSTL, Mississippi 39529	1
Dr. Bernard Douda Naval Weapons Support Center Code 50C Crane, Indiana 47522-5050	1	Naval Weapons Center Attn: Dr. Ron Atkins Chemistry Division China Lake, California 93555	1
Naval Civil Engineering Laboratory Attn: Dr. R. W. Drisko, Code L52 Port Hueneme, California 93401	1	Scientific Advisor Commandant of the Marine Corps Code RD-1 Washington, D.C. 20380	1
Defense Technical Information Center Building 5, Cameron Station Alexandria, Virginia 22314	12 high quality	U.S. Army Research Office Attn: CRD-AA-IP P.O. Box 12211 Research Triangle Park, NC 27709	1
DTNSRDC Attn: Dr. H. Singerman Applied Chemistry Division Annapolis, Maryland 21401	1	Mr. John Boyle Materials Branch Naval Ship Engineering Center Philadelphia, Pennsylvania 19112	1
Dr. William Tolles Superintendent Chemistry Division, Code 6100 Naval Research Laboratory Washington, D.C. 20375-5000	1	Naval Ocean Systems Center Attn: Dr. S. Yamamoto Marine Sciences Division San Diego, California 91232	1

DL/1113/87/2

ABSTRACTS DISTRIBUTION LIST, 356B

Professor T. Marks
Department of Chemistry
Northwestern University
Evanston, Illinois 60201

Dr. Kurt Baum
Fluorochem, Inc.
680 S. Ayon Avenue
Azuza, California 91702

Dr. Ulrich W. Suter
Department of Chemical and Engineering
Massachusetts Institute of Technologies
Room E19-628
Cambridge, MA 02139-4309

Dr. William Bailey
Department of Chemistry
University of Maryland
College Park, Maryland 20742

Dr. J.C.H. Chien
Department of Polymer Science and
Engineering
University of Massachusetts
Amherst, MA 01003

Professor G. Whitesides
Department of Chemistry
Harvard University
Cambridge, Massachusetts 02138

Dr. K. Paciorek
Ultrasystems, Inc.
P.O. Box 19605
Irvine, California 92715

Dr. Ronald Archer
Department of Chemistry
University of Massachusetts
Amherst, Massachusetts 01002

Professor D. Seydel
Department of Chemistry
Massachusetts Institute of Technology
Cambridge, Massachusetts 02139

Professor J. Moore
Department of Chemistry
Rensselaer Polytechnic Institute
Troy, New York 12181

Dr. V. Percec
Department of Macromolecular
Science
Case Western Reserve University
Cleveland, Ohio 44106

Dr. Gregory Girolami
Department of Chemistry
University of Illinois
Urbana-Champaign, IL 61801

Dr. Ted Walton
Chemistry Division
Code 6120
Naval Research Lab
Washington D.C. 20375-5000

Professor Warren T. Ford
Department of Chemistry
Oklahoma State University
Stillwater, OK 74078

Professor H. K. Hall, Jr.
Department of Chemistry
The University Arizona
Tucson, Arizona 85721

Dr. Fred Wudl
Department of Chemistry
University of California
Santa Barbara, CA 93106

Professor Kris Matjaszewski
Department of Chemistry
Carnegie-Mellon University
4400 Fifth Avenue
Pittsburgh, PA 15213

Professor Richard Schrock
Department of Chemistry
Massachusetts Institute of Technology
Cambridge, MA 02139

DL/1113/87/2

ABSTRACTS DISTRIBUTION LIST, 356B

Professor A. G. MacDiarmid
Department of Chemistry
University of Pennsylvania
Philadelphia, Pennsylvania 19174

Dr. E. Fischer, Code 2853
Naval Ship Research and
Development Center
Annapolis, Maryland 21402

Professor H. Allcock
Department of Chemistry
Pennsylvania State University
University Park, Pennsylvania 16802

Professor R. Lenz
Department of Chemistry
University of Massachusetts
Amherst, Massachusetts 01002

Professor G. Wnek
Department of Chemistry
Rensselaer Polytechnic Institute
Troy, NY 12181

Professor C. Allen
Department of Chemistry
University of Vermont
Burlington, Vermont 05401

Dr. Ivan Caplan
DTNSRDC
Code 0125
Annapolis, MD 21401

Dr. R. Miller
Almaden Research Center
650 Harry Road K91B801
San Jose, CA 95120

Dr. William B. Moniz
Chemistry Division
Naval Research Laboratory
Washington, D.C. 20375-5000

Dr. Richard M. Laine
SRI International
333 Ravenswood Avenue
Menlo Park, California 94025

Dr. L. Buckley
Naval Air Development Center
Code 6063
Warminster, Pennsylvania 18974

Dr. James McGrath
Department of Chemistry
Virginia Polytechnic Institute
Blacksburg, Virginia 24061

Dr. Geoffrey Lindsay
Chemistry Division
Naval Weapons Center
China Lake, California 93555

Professor J. Salamone
Department of Chemistry
University of Lowell
Lowell, Massachusetts 01854

Dr. J. Griffith
Naval Research Laboratory
Chemistry Section, Code 6120
Washington, D. C. 20375-5000

Professor T. Katz
Department of Chemistry
Columbia University
New York, New York 10027

Dr. Christopher K. Ober
Department of Materials Science
and Engineering
Cornell University
Ithaca, New York 14853-1501

END

FILMED

FEB. 1988

DTIC